



# Leapfrog My Own Leaptop Battery Replacement Guide

Replacement of malfunctioning or dead batteries.

Written By: Jonathan Fitzer



## INTRODUCTION

This guide is designed to instruct users on how properly replace dead or low batteries in the device. Tools will be necessary as well as new AA batteries.

---



### TOOLS:

- [Phillips #1 Screwdriver](#) (1)
  - [Plastic Opening Tool](#) (1)
-

## Step 1 — Battery




- Flip over device so that back portion of the device is facing you.

## Step 2



- Unscrew the one 10mm screw that holds the battery cover in place with a a PH1 phillips head screwdriver.
- ☑ Please note that the screw cannot be removed as it is attached to the battery cover.

## Step 3

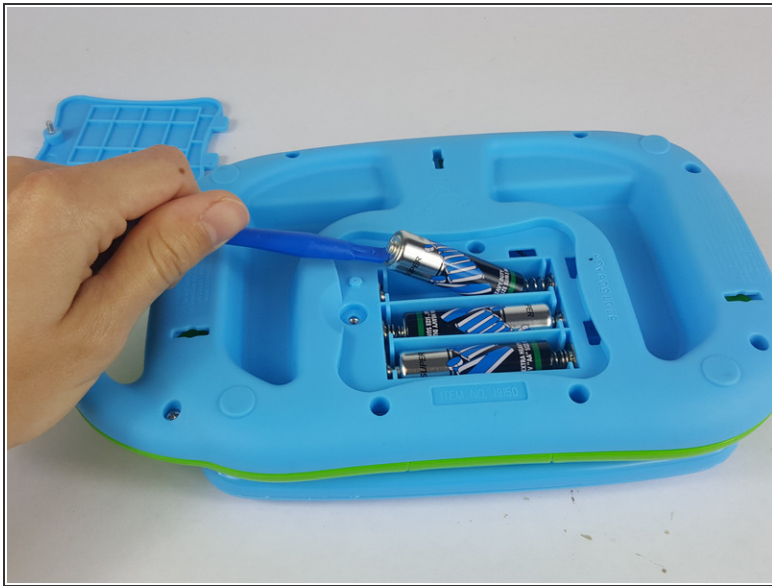

- Carefully pry the batteries out with a plastic opening tool prying from the non spring side.
- Remove the three AA batteries.
- ⓘ Note the direction of the batteries for when reassembling.

This document was last generated on 2017-06-18 08:25:56 AM.